


A flexible binding tape for winding applications.  
Braided fiberglass thread, unvarnished.

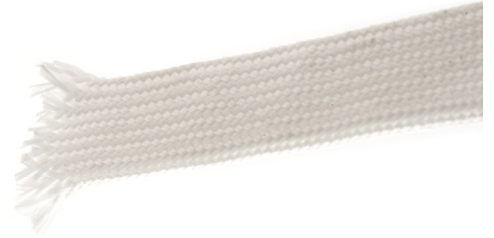

## Typical applications

Suitable for use in electrical and electronic constructions, electrical machinery and motors class C.

## Properties

- Withstands liquid fuels, no degradation
- Highly flexible
- Resistant to transformer oils in acc. with UTEC 93641
- Not watertight
- Suitable for Class C varnishes

## Composition

Braided fiberglass yarn, unvarnished

## Colour

Standard: White

## Technical data

- Temperature class C 450°C
- Working temperature -60°C to +450°C  
Intermittent +550°C (a few hours)
- Breakdown voltage 0.5 kV to 1.5 kV depending on wall thickness

## Approvals, standards

- NF EN 60684-1 ( 10-2003 )
- NF EN 60684-2 ( 07-2012 )

Item number	Internal Diameter (mm)	Min Diameter int (mm)	Max Diameter int (mm)	Wall Thickness approx. (mm)	Packaging on bobbins/m
125743	3	2.8	3.2	0.28	200
125744	6	5.7	6.3	0.32	300
125745	8	7.6	8.4	0.40	200
125746	10	9.5	10.5	0.45	200
125747	12	11	13	0.40	200
125748	14	13	15	0.50	50
125749	16	15	17	0.50	50

## How to contact BEVI

Contact details for all countries are continually updated on our website.  
Please visit [www.bevi.com](http://www.bevi.com) to access the information direct.

BEVI AB (Headquarters)  
Blomstermåla, Sweden  
Tel. +46 499 271 00  
[info@bevi.se](mailto:info@bevi.se)